


M-M

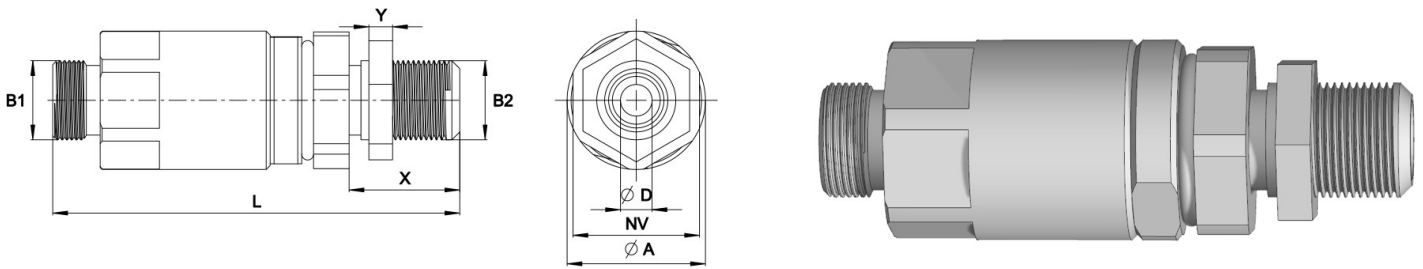

MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV	X	Y	Max work pressure	Max peak pressure	Pressure class	Seal kit
5001725	M20 x 1,5	M20 x 1,5	103 mm	35 mm	8 mm	32 mm	28 mm	6 mm	36.5 MPa	55 MPa	12-S	5001631
5001728	M24 x 1,5	M24 x 1,5	107 mm	35 mm	12 mm	32 mm	30 mm	7 mm	35 MPa	52.5 MPa	16-S	5001632
5001731	M30 x 2,0	M30 x 2,0	121 mm	40 mm	16 mm	36 mm	35 mm	8 mm	35 MPa	52.5 MPa	20-S	5001633
5001734	M36 x 2,0	M36 x 2,0	128 mm	50 mm	20 mm	46 mm	38 mm	9 mm	27.5 MPa	45 MPa	28-L	5001634
5001743	M36 x 2,0	G 1	112 mm	50 mm	20 mm	46 mm			27.5 MPa	45 MPa	28-L	5001634

M = Metric

G = BSP, 60° cone

Temperature range (standard) = -30° C - +100° C

For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com